

LittaTrap™ Drop-In Full Trash Capture Drop In.



The California-certified, drop-in solution designed for new catch basins—standard sizes, fast installation and straightforward maintenance.



CALIFORNIA CERTIFIED
Certified for California
Full Trash Capture compliance.



FAST INSTALLATION
Drops directly into standard
catch-basin structures.



BUILT TO LAST
Durable stainless-steel frame with
a Full Capture LittaTrap™ basket.

FULL TRASH CAPTURE WITHOUT THE RETROFIT.

- ✓ Made for developments with new standard sized catch basins, with fast and easy installation.
- ✓ Standard models and straightforward ordering.
- ✓ Avoids post-construction retrofit coordination.
- ✓ Simple access for ongoing maintenance.



**15 sec.
install
time**

CAPTURE AT SOURCE

INSTALLATION THREE STEPS. DONE.

Simple. Fast. No special tools.
Made to fit the specified
structure size, eliminating
the need for site measurements
or custom fabrication.



Easier than easy!

EASY MAINTENANCE

LIFT. TIP. REUSE.

ENVIROPOD.COM


Maintenance is a simple process that requires no confined space entry.



**MANUALLY
BY HAND**



**VACUUM
TRUCK**

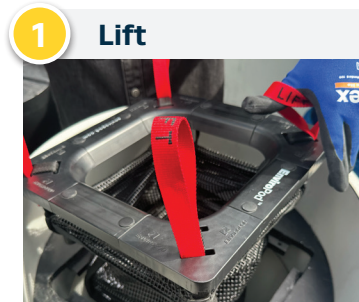

Lift the LittaTrap™ out of the catch basin using the LIFT handles.



Tip the contents out of LittaTrap™ into suitable receptacle for contents



Place LittaTrap™ securely back into the frame and seal, and close grate.

SIZING

Stainless Steel Grate Inlet Drop-In Standard Sizes

Nominal CB Size	LittaTrap™ Model*	Stainless Steel Filterbox	SKU with Vector Portal
18" x 18"	LT4545	19 7/8" x 17 7/8"	LTFCDI-V-4545-KIT
24" x 24"	LT6060	25 3/4" x 23 3/4"	LTFCDI-V-6060-KIT
36" x 24"	LT9060	39 3/4" x 23 3/4"	LTFCDI-V-9060-4024-KIT
36" x 36"	LT9060	37 7/8" x 35 7/8"	LTFCDI-V-9060-3836-KIT

*See Technical Specification for each LittaTrap™ model technical properties

Circular Stainless PVC Manhole Steel Drop-In Standard Sizes

Nominal CB Size	LittaTrap™ Model*	Stainless Steel Filterbox	SKU with Vector Portal
15" MH	LT3030	14 1/2" dia. MH	LTDIMH3030-PVC375-V-UM
18" MH	LT4545	17 1/4" dia. MH	LTDIMH4545-PVC450-V-UM
24" MH	LT4545	23" dia. MH	LTDIMH4545-PVC600-V-UM
30" MH	LT6060	30" dia. MH	LTDIMH6060-PVC750-V-UM
36" MH	LT6060	35 7/8" dia. MH	LTDIMH6060-PVC900-V-UM

*See Technical Specification for each LittaTrap™ model technical properties

TECHNICAL SPECIFICATION

LittaTrap™ Model	Screen Area (in²)	Maximum Trash Capture Volume MTCV (ft³)	Design Flow Rate 50% MTCV CFS	Standard Bypass Flow CFS
LT3030	194.5	0.17	0.49	1.47
LT4545	601	0.7	2.1	2.1
LT6060	969	1.6	3.2	3.3
LT9060	1473	3.0	4.8	4.5

The EnviroPod™ LittaTrap™ has an adjustable bypass. Flow rates listed are for a factory set bypass. Please contact EnviroPod™ for specific bypass requirements.

